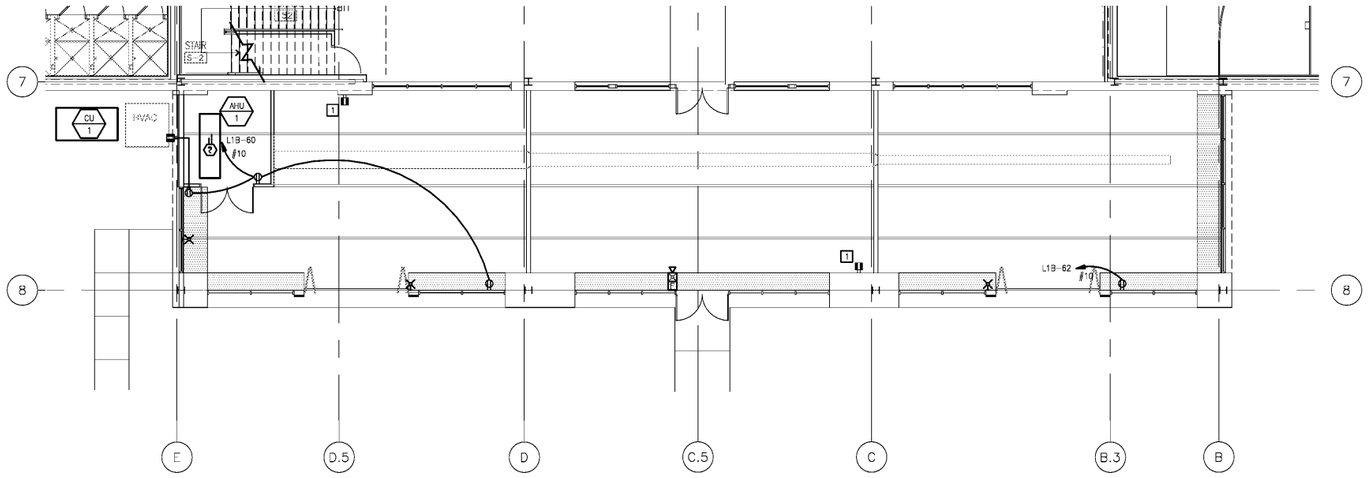

1 / E2.1 **POWER PLAN**
SCALE: 1/8" = 1'-0"

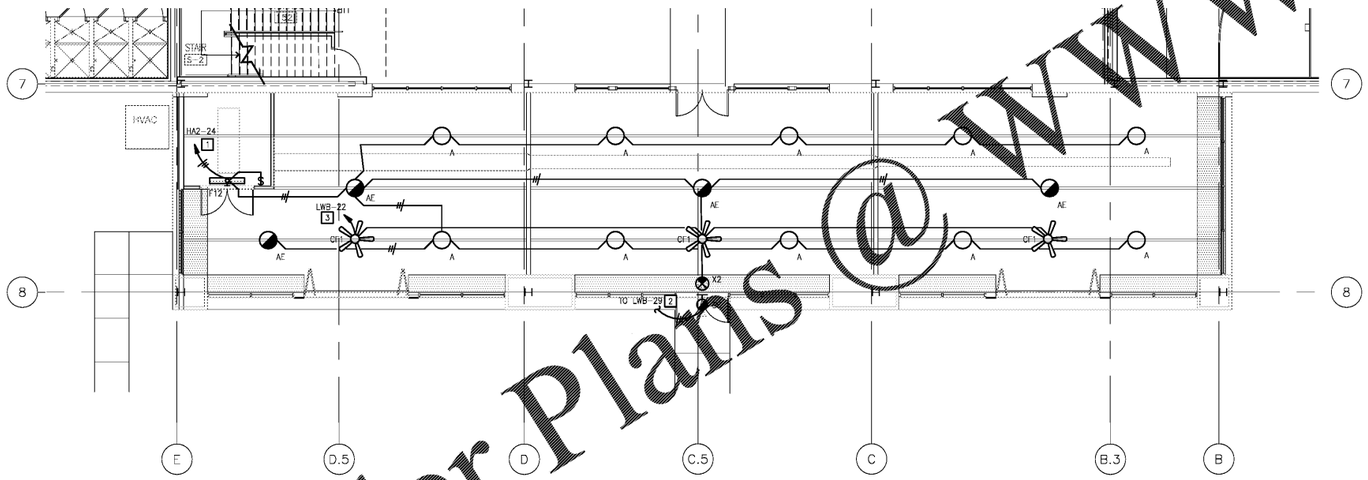

1 / E2.1 **LIGHTING PLAN**
SCALE: 1/8" = 1'-0"

GENERAL POWER NOTES
(THIS DRAWING ONLY)

1. TYPICAL MECHANICAL EQUIPMENT TAG. (77 / ##) MECHANICAL EQUIPMENT CONNECTION SCHEDULE FOR EQUIPMENT CONNECTION REQUIREMENTS.
2. COORDINATE WITH THE MECHANICAL DRAWINGS AND THE MECHANICAL CONTRACTOR FOR THE EXACT LOCATIONS AND REQUIREMENTS OF ALL MECHANICAL EQUIPMENT PRIOR TO ROUGH-IN.
3. CONDUIT SHOWN OUTSIDE OF THE BUILDING FOR CLARITY ONLY. ALL CONDUIT SHALL REMAIN WITH IN THE WALLS OR BUILDING.
4. BRANCH CIRCUITS SHALL HAVE THE SAME SIZE CONDUCTORS FOR THE ENTIRE LENGTH OF THE CIRCUIT.
5. COORDINATE INSTALLATION OF THE TAMPER AND FLOW SWITCHES AT THE SPRINKLER RISER WITH FIRE PROTECTION CONTRACTOR.

POWER KEYED NOTES

1. REMOVE LOCKABLE WEATHERPROOF COVER FROM EXISTING OUTDOOR RECEPTACLE AND PROVIDE NEW COVERPLATE.

GENERAL LIGHTING NOTES
(THIS DRAWING ONLY)

1. EXIT SIGNS AND/OR EMERGENCY BATTERY LIGHTS SHALL BE CONNECTED AHEAD OF LIGHTING SWITCHES. DO NOT SWITCH EXIT SIGNS AND/OR EMERGENCY BATTERY LIGHTS.
2. FIXTURES WITH EMERGENCY BATTERY BALLASTS SHALL HAVE ONE CONSTANT HOT CONDUCTOR CONNECTED AHEAD OF THE LIGHTING SWITCH. FIXTURE TO BE SWITCHED WITH THE OTHER FIXTURES ON THE SWITCH.
3. EXISTING LIGHTING CONTACTOR LC-1 IS A 12-POLE ELECTRICALLY-OPERATED, MECHANICALLY-HELD LIGHTING CONTACTOR LOCATED IN THE FIRST FLOOR ELECTRICAL ROOM. LIGHTING CONTACTOR LC-1 IS CONTROLLED BY MASTER LIGHT SWITCH BY BREAK ROOM.
4. EXISTING CONTACTOR TV-D IS A 12-POLE ELECTRICALLY-OPERATED, MECHANICALLY-HELD LIGHTING CONTACTOR LOCATED IN THE FIRST FLOOR ELECTRICAL ROOM. CONTACTOR TV-D IS CONTROLLED BY ASTRONOMIC TIME CLOCK.
5. EXISTING CONTACTOR TV-G ISA 12-POLE MECHANICALLY HELD ELECTRICALLY OPERATED CONTACTOR LOCATED IN THE FIRST FLOOR ELECTRICAL ROOM. CONTACTOR TV-G IS CONTROLLED BY MASTER SWITCH BY BREAK ROOM.
6. EXTERIOR WALLPACK CIRCUITING SHOWN IS SHOWN ON THE BUILDING EXTERIOR FOR CLARITY ONLY. ROUTE ALL CIRCUITING FOR WALLPACKS ON BUILDING INTERIOR.
7. BRANCH CIRCUITS SHALL HAVE THE SAME SIZE CONDUCTORS FOR THE ENTIRE LENGTH OF THE CIRCUIT.
8. PAINT EXPOSED CONDUIT TO MATCH STRUCTURE.

LIGHTING KEYED NOTES

1. ROUTE HOMERUN THROUGH LIGHTING CONTACTOR LC-1. PROVIDE ADDITIONAL UNSWITCHED HOT BYPASSING CONTACTOR FOR FIXTURE'S BATTERY CHARGING CONDUCTOR.
2. ROUTE HOMERUN THROUGH CONTACTOR TV-D. PROVIDE ADDITIONAL UNSWITCHED HOT BYPASSING CONTACTOR FOR FIXTURE'S BATTERY CHARGING CONDUCTOR.
3. ROUTE HOMERUN THROUGH CONTACTOR TV-G.



KEYED PLAN

Order Plans @ WWW.LDILine.com

Pate Design Group, Inc.
Architecture / Interiors

1640 Powers Ferry Rd SE
Bld. 16, Ste. 300
Marietta, Georgia 30067

(p) 770-814-0885
(f) 770-814-0886

kirby@patedesigngroup.com

ONELIFE FITNESS
PORCH ENCLOSURE
4512 HOLLY SPRINGS PKWY
HOLLY SPRINGS, GA 30115

Revisions:

No.	Date	Description
	9/23/19	PERMIT

ELECTRICAL PLANS

Drawn
BAD
Checked
WSG
Contract No.
19-30
Scale
AS INDIC
Date
080619
Last Rev.

GEORGIA REGISTERED No. 16 PROFESSIONAL 01-20-19 ENGINEER WILLIAM S. GADDY, JR.

E2.1
3 *of* 3 *sheets*

RELEASED FOR CONSTRUCTION

THIS DRAWING IS THE PROPERTY OF PATE DESIGN GROUP AND IS NOT TO BE COPIED IN WHOLE OR IN PART. IT IS TO BE USED FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN, AND IS NOT TO BE USED IN ANY OTHER PROJECT. IT IS TO BE RETURNED UPON REQUEST.