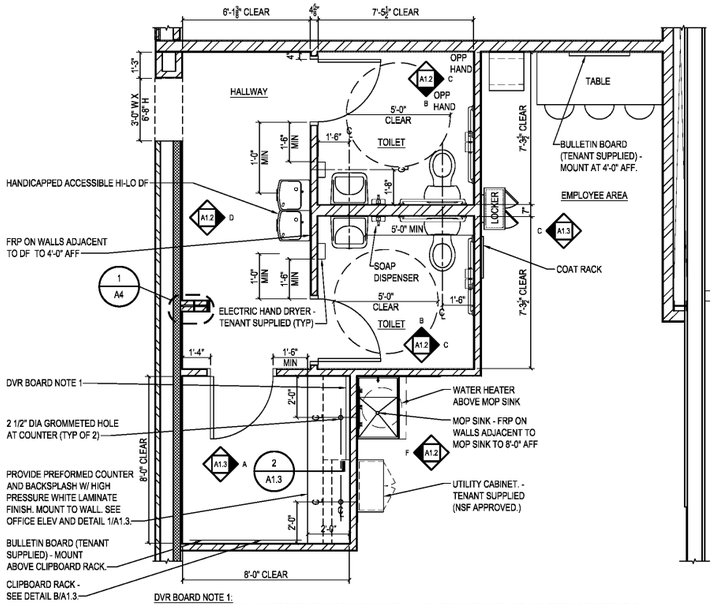

DVR BOARD NOTE 1:
PROVIDE 3'-6"(H) x 4'-0"(W) 3/4" FIRE RETARDANT PLYWOOD WITH A UL CLASSIFICATION STAMP THAT MEETS OR EXCEEDS THE REQUIREMENTS FOR CLASS 1 OR CLASS A FLAME-SPREAD RATING (IBC 2015 SECT. 2303.2) MOUNT FROM TOP 8'-0" A.F.F. WITH EDGE TIGHT AGAINST ADJACENT WALL. SECURE TO FRAMING SO IT HOLDS 250 LBS.

1 A1.2 ENLARGED PLAN
SCALE: 3/8" = 1'-0"

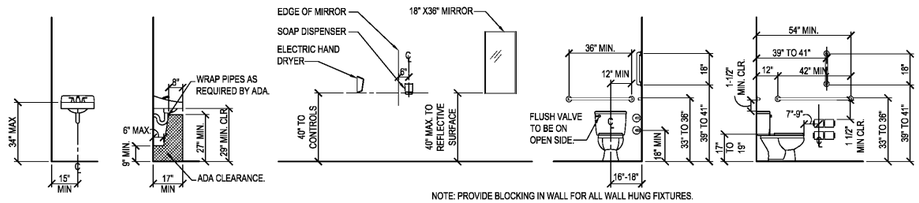

NOTE: PROVIDE BLOCKING IN WALL FOR ALL WALL HUNG FIXTURES.

A A1.2 TYPICAL ACCESSIBILITY CLEARANCES
SCALE: 3/8" = 1'-0"

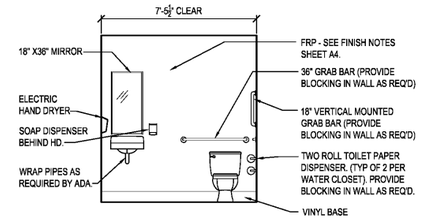

B A1.2 TOILET ELEVATION
SCALE: 3/8" = 1'-0"



C A1.2 TOILET ELEVATION
SCALE: 3/8" = 1'-0"

GENERAL REST ROOM NOTES:

1. LAYOUT OF TOILET ROOM FACILITIES SHALL COMPLY WITH ALL APPLICABLE STATE AND LOCAL CODES, INCLUDING ALL ADA REQUIREMENTS. SUBMIT ANY MODIFIED LAYOUTS TO OWNER'S DOLLER FOR THEIR REVIEW AND APPROVAL.
2. TOILET ACCESSORIES ARE SUPPLIED BY TENANT AND INCLUDE THE FOLLOWING ACCESSORIES FOR EACH TOILET:
   - 18"X36" WALL MIRROR WITH CONCEALED MOUNTING CENTERED OVER EACH LAVATORY. INSTALL W/ BASE OF REFLECTIVE SURFACE @ 40" A.F.F. PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - DUAL ROLL TOILET TISSUE DISPENSER, 18 GA. CHROME PLATED STEEL OR APPROVED EQUAL. INSTALL PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - STN. STL. COAT HOOK MOUNTED TO DOOR FACE OR APPROVED EQUAL. INSTALL HOOK @ 4'-0" A.F.F. MAX.
   - 1 1/4" Ø, 36" & 42" LONG, 18" STRAIGHT SIDE APPROVED GRAB BARS MOUNTED TO WALL. INSTALL GRAB BARS PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - PROVIDE J-BOX PER ELECTRICAL DRWGS. FOR TENANT SUPPLIED AND INSTALLED HAND DRYER.
   - SOAP DISPENSER MOUNTED PER ADA REQUIREMENTS SHOWN ON THIS SHEET.
   - CODE APPROVED ROOM IDENTIFICATION SIGN INSTALLED ADJACENT TO STRIKE JAMB/LATCH SIDE OF DOOR W/ HORIZONTAL CENTERLINE @ 60" A.F.F.
3. INSTALL CONTINUOUS FIRE RETARDANT TREATED 2x6 BLOCKING BETWEEN STUDS FOR ALL HANDRAILS, GRAB BARS, FIXTURES, BRACKETS, ACCESSORIES, CABINETRY, AND MISC. SPECIALTIES AS REQUIRED, UNLESS NOTED OTHERWISE.
4. USE 5/8" MOISTURE RESISTANT G.W.B. (GREENBOARD) FOR TOILET ROOM WALLS.
5. DOOR HARDWARE MUST BE MOUNTED BETWEEN 34 (MIN.) & 48 INCHES (MAX.)
6. FLUSH CONTROLS SHALL BE LOCATED ON THE OPEN SIDE OF THE WATER CLOSET.

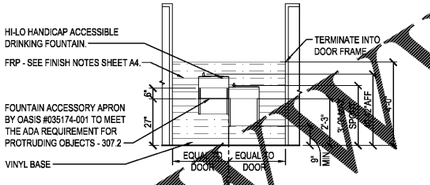

D A1.2 DRINKING FOUNTAIN ELEVATION
SCALE: 3/8" = 1'-0"



E A1.2 SIGNAGE ELEVATION
SCALE: NTS

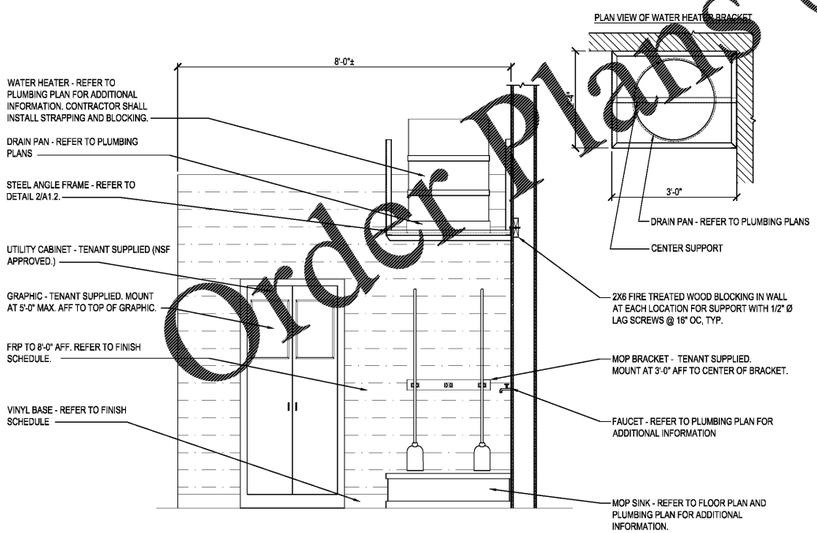

F A1.2 MOP SINK AND UTILITY CABINET ELEVATION
SCALE: 3/4" = 1'-0"

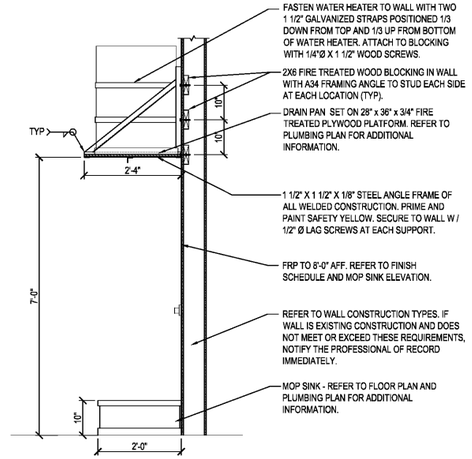

2 A1.2 WATER HEATER MOUNTING DETAIL
SCALE: 3/4" = 1'-0"

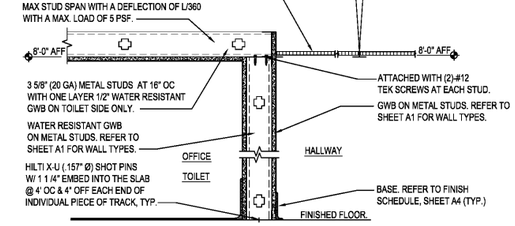

NOTE:
1. REFER TO FINISH SCHEDULE FOR ALL FINISHES, SHEET A4

3 A1.2 CEILING DETAIL AT TOILET / OFFICE / HALLWAY
SCALE: 1 1/2" = 1'-0"

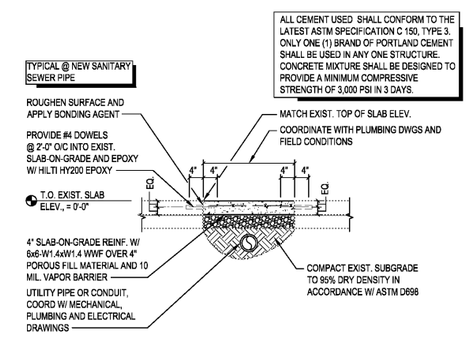

4 A1.2 SLAB IN-FILL DETAIL
SCALE: 3/4" = 1'-0"

Order Plans @ WWW.LDLine.com

mark	date	by	description

date	2-5-2020
project	20190-03
designed	CSY
drawn	CSY
checked	DAE

RRMM ARCHITECTS, PC
1317 Executive Blvd, Suite 200
Chesapeake, VA 23320
(757)622-2826 / fax (757)622-6983

DONNA A. ELLIOTT
REGISTERED ARCHITECT
No. 101-0001
STATE OF TENNESSEE
2-6-2020

project
FAMILY DOLLAR STORE, FDS #7915567
501 TENNESSEE AVE NORTH - PARSONS, TN 38363

drawing
ENLARGED PLAN, DETAILS, SECTIONS, AND ELEVATIONS

sheet
A1.2